

MORE LIGHT

JDL-BAB-30-19-1060-TE-60-1.5

High-power diode laser bars: 1060 nm, 60 W cw

Features

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

Applications

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Printing industry
- Defense and security

High-power diode laser bars | 1060 nm, 60 W cw JDL-BAB-30-19-1060-TE-60-1.5

Specifications

JDL-BAB-30-19-1060-TE-60-1.5

Operation*	Symbol	Min	Nom	Max	Unit
Wavelength (cw)	λ	1057	1060	1063	nm
Optical Output Power	P_{opt}		60		W
Operation Mode			CW, switched		
Power Modulation			100		%
Geometrical					
Number of Emitters			19		
Emitter Width	W	145	150	155	μm
Emitter Pitch	P		500		μm
Filling Factor	F		30		%
Width	B	9600	9800	10000	μm
Cavity Length	L	1480	1500	1520	μm
Thickness	D	115	120	125	μm
Electro Optical Data*					
Fast Axis Divergence (FWHM)	θ_{\perp}		27	30	$^{\circ}$
Fast Axis Divergence**	θ_{\perp}		55	58	$^{\circ}$
Slow Axis Divergence at 60 W (FWHM)	θ_{\parallel}		6	8	$^{\circ}$
Slow Axis Divergence at 60 W**	θ_{\parallel}		7	9	$^{\circ}$
Pulse Wavelength	λ	1049	1052	1055	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		5	6	nm
Slope Efficiency***	η	0.98	1.0		W/A
Threshold Current	I_{th}		6	8	A
Operating Current	I_{op}		66	70	A
Operating Voltage	V_{op}		1.46	1.50	V
Series Resistance	R_s		3.0	3.5	m Ω
Degree of TE Polarization	α	95			%
EO Conversion Efficiency***	η_{tot}	57	62		%

* Mounted on a heat sink with $R_{th}=0.5\text{K/W}$, coolant temperature 25°C


** Full width at 95 % power content

*** Item may change upon notice and acceptance by Jenoptik, due to future improvements of technology or processing

Note: Nominal data represents typical values.

Safety Advice: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

Power - Current - Voltage - Characteristics*

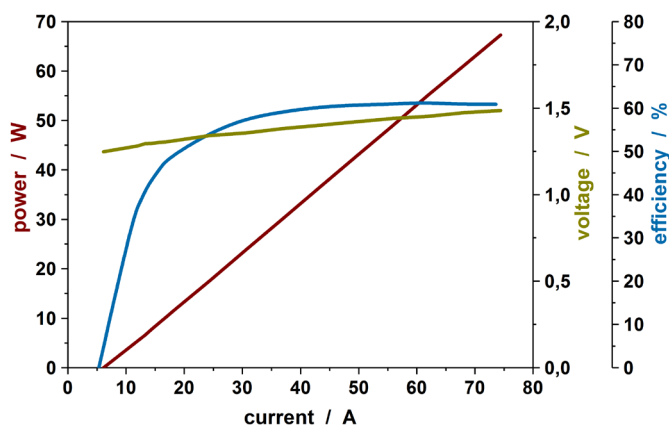

Spectral Characteristics*

